
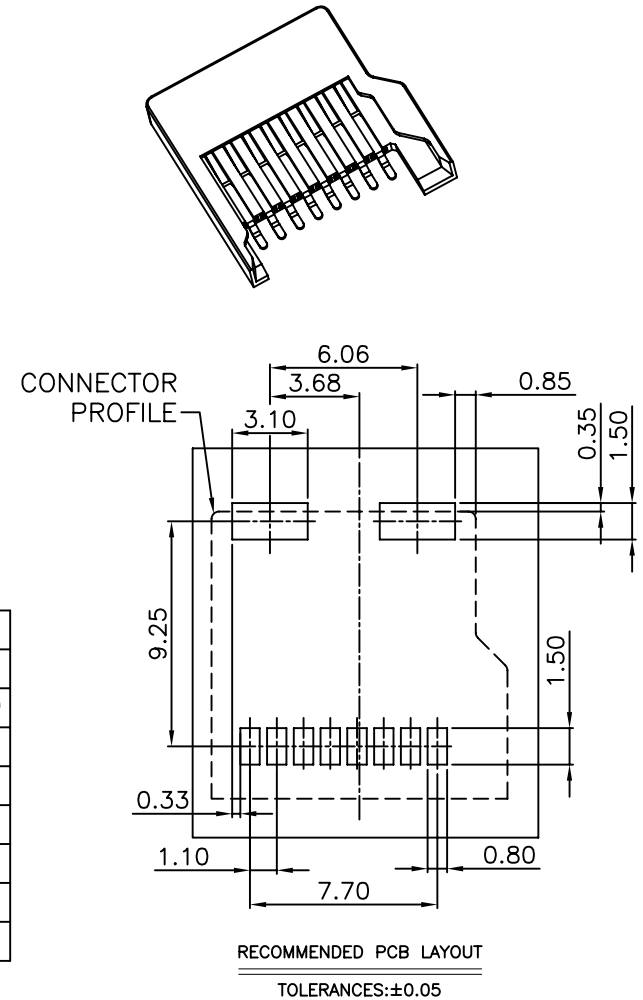
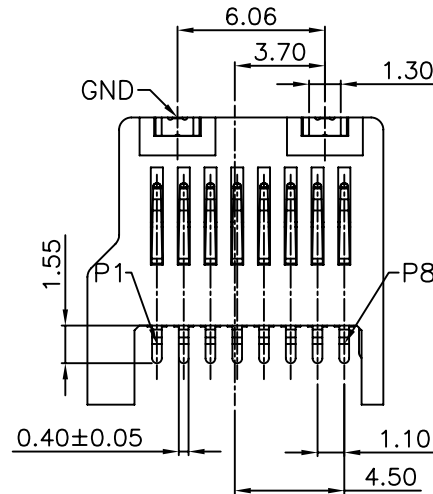


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER	140116	HANG

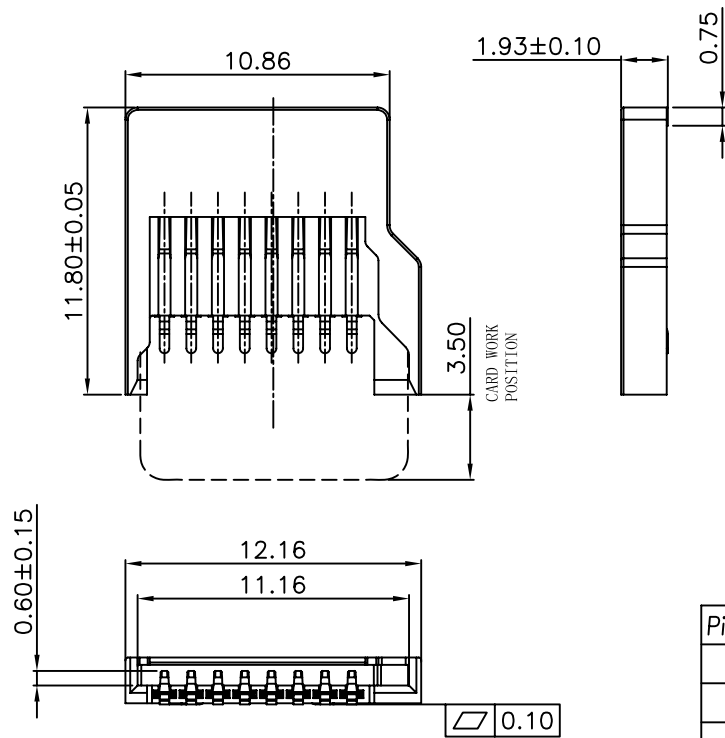

Pin No.	NAME	TYPE	DESCRIPTION
1	DAT 2	I/O/PP	Date Line(bit2)
2	CD/DAT 3	I/O/PP	Card Detect/Date Line(bit3)
3	CMD	PP	Command Response
4	VDD	S	Supply Voltage
5	CLK	I	Colck
6	VSS	S	Supply Voltage Ground
7	DAT0	I/O/PP	Date Line(bit0)
8	DAT1	I/O/PP	Date Line(bit1)

NOTES:

- MATERIAL:**
HOUSING:LCP MG350,UL 94V-0,30%G/F FILLED;
COLOR:BLACK
CONTACT:COPPER ALLOY T=0.15mm
GROUND:STAINLESS T=0.15mm
- FINISH:**
CONTACT: 1u" GOLD PLATING ON CONTACT AREA
Tin 80u" MIN PLATING ON SOLDER TAILS
50u" MIN NICKEL UNDERPLATING OVER ALL
GROUND: Sn 100u" MIN PLATING ON SOLDER TAILS
50u" MIN NICKEL UNDERPLATING OVER ALL
- PRODUCT SPECIFICATIONS:**
VOLTAGE RATING: 50V
CURRENT RATING: 0.5A
INSULATION RESISTANCE: 500MEG.OHM MIN
CONTACT RESISTANCE: 50 MILL.OHM MAX
OPERATION TEMPERATURE: -20° TO +85°
DURABILITY: 5000 CYCLES

DIM	TOL	DIM	TOL
X.	±0.30	X".	±4.0"
X.X	±0.25	X.X"	±3.0"
X.XX	±0.20	X.XX"	±2.0"
X.XXX	±0.10	X.XXX"	±1.0"

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

LASTAR			Lastar Technology CO.,LTD		
			TEL:0755-27157971 FAX:0755-27157976 Http://www.lsdconn.com		
DRAW NO.	070-04H-08L6	DATE	DRAW NAME: T-Flash Card No Push 全塑抽屉式		
DESIGN	HANG	140116	P/N NO. TF-070-04H-08L6		
CHECK	WANGCM	140116	FILE:		
APPROVED	HUYX	140116	UNIT: mm	SHEET: 1/2	MODEL:
			REV. A0 SCALE N/A		